

ECOTANK PRINTERS

ECOTANK L6570 / L6580

EPSON



BRINGING THE COMBINED POWER OF QUALITY, FUNCTIONALITY AND SPEED TO OFFICE PRINTING.

Cut through demanding workloads with the EcoTank L6570 and L6580 colour printers. High print speeds of up to 25 ipm¹ and the all-in-one capability enable seamless printing, copying and scanning of office documents without any delays. Print letterheads, envelopes and even engineering drawings at the finest quality with Epson's DURABrite ET inks. Print using WiFi Direct from any smart device, or print using the intuitive 10.9 cm (4.3") touchscreen to make your office printing effortless.



EcoTank L6570

EcoTank L6580



Print Speed



Print Up to A4



Duplex Printing¹



Ultra-high Page Yield



Ethernet



1 Year Warranty²



Each printer comes bundled with a starter kit of 4 bottles of Epson genuine inks.



Epson's Heat-Free Technology

An innovation that cuts the heat out of office printing. As a result, you save time, money, power and the environment.

DURABrite ET Pigment Ink

Specially-formulated pigment ink that achieves long-lasting, razor-sharp and water-resistant prints.

Epson Warranty for Peace of Mind

Enjoy warranty coverage of one year or 200,000 prints, whichever comes first.

¹Under standard test conditions. ²Conditions apply. ³Warranty of one year or 200,000 prints, whichever comes first. ⁴A4 size only. ⁵Source: IDC Asia Pacific Hardcopy Peripheral Tracker CY2022. Volume market share of A4 Inkjet printers and MFPs.

SPECIFICATIONS

ECOTANK L6570 / L6580




MODEL NUMBER	L6570	L6580
Printer Type	Print, Scan, Copy, Fax with ADF	
Printing	PrecisionCore™ Printhead	
Printing Technology	800 x 1 nozzles each (Black, Cyan, Magenta, Yellow)	
Nozzle Configuration	Bi-directional printing	
Print Direction	4800 x 2400 dpi	
Maximum Resolution	3.8 pl	
Minimum Ink Droplet Volume	Up to 32 ppm / 32 ppm	
Print Speed ¹	Simplex: Up to 25.0 ipm / 25.0 ipm Duplex: Up to 21 ipm / 21 ipm	
Draft Text - Memo, A4 (Black ² / Colour ²)	Simplex: Up to 5.5 sec / 5.5 sec Duplex: Up to 11.0 sec / 11.5 sec	
ISO 24734, A4 (Black / Colour)	Approx. 26 sec per photo (Border / Borderless)	
First Page Out Time (Black / Colour), A4	ESC/P-R, ESC/P Raster	
Photo Default - 10 x 15 cm / 4 x 6" ^{** #3} (Border / Borderless)	Yes (A4 size)	
Printer Language	ESCP-R / ESCP-Raster, PCL and Post Script	
Automatic 2-sided printing (Duplex Printing)		
Copying		
Copy Speed	Simplex: Up to 23.0 ipm / 23.0 ipm	
ISO 29183, A4 (Black / Colour), Flatbed	Simplex: Up to 22.5 ipm / 22.5 ipm Duplex: Up to 19.0 ipm / 19.0 ipm	
ISO 24735, A4 (Black / Colour), ADF	999 copies	
Maximum Copies from Standalone	25 - 400%	
Reduction/Enlargement	600 x 600 dpi	
Maximum Copy Resolution	Legal	
Maximum Copy Size		
Scanning		
Scanner Type	Flatbed colour image scanner	
Duplex Scanning	Yes (A4 size)	
Sensor Type	CIS	
Optical Resolution	1200 x 2400 dpi	
Maximum Scan Area (Flatbed and ADF)	Flatbed: A4, Letter ADF: Up to legal	
Scanner Bit Depth		
Colour	48-bit input, 24-bit output	
Grayscale	16-bit input, 8-bit output	
Black & White	16-bit input, 1-bit output	
Scan Speed (A4 Flatbed / ADF)		
Monochrome 200 dpi	Flatbed: 5 sec ADF (Simplex / Duplex): Up to 27.5 ipm / 11 ipm	
Colour 200 dpi	Flatbed: 10 sec ADF (Simplex / Duplex): Up to 9.0 ipm / 6.0 ipm	
Fax Function		
Type of Fax	Walkup B/W & Colour Fax, PC Fax	
Receive Memory / Page Memory	6 MB, Page memory up to 550 pages	
Error Correction Mode	ITU-T T.30	
FAX Speed (Data Transfer Rate)	Up to 33.6 kbps, Approx. 3 sec/page	
FAX Resolution	Up to 200 x 200 dpi	
Transmission Paper Size		
Flatbed	A4	
ADF	A4	
Receiving Paper Size	Half Letter, A5, B5, A4, Letter, Legal	
Speed Dial / Group Dial	Up to 200 numbers, 199 groups	
Fax Features	PC Fax (Transmission/Receive), Automatic Redial, Address book, Broadcast Fax (Mono Only), Transmit Reservation, Polling Reception, Fax Preview, Memory reception, Fax to Email, Fax to Folder, Automatic 2-sided Fax	
ADF Function		
Support Paper Thickness	64-95 g/m ²	
Paper Capacity	50 sheets	
Card Slot / USB Host Function		
Type of Direct Printing	USB Memory	
Paper Handling		
Paper Feed Method	Friction Feed	
Number of Paper Trays	THREE (2-Front Cassette, 1-Rear Feeder)	
Paper Hold Capacity		
Input Capacity	Cassette1: 250 sheets; Cassette 2: 250 sheets; Rear feeder: 50 sheets	
Output Capacity	125 sheets	
Paper Size	A4, Letter, Legal	
Maximum Paper Size	B4, B5, A5, B6, A6, 8.5 x 13", 5 x 7", 4 x 6", 8 x 10", Legal (8.5 x 14"), 16:9 wide, Envelopes: #10, DL, C6, C4	
Print Margin	215.9 x 600 mm	
	3 mm top, left, right, bottom via custom settings in printer driver	
Interface		
USB	USB 2.0	
Network	Ethernet, WiFi IEEE 802.11b/g/n, WiFi Direct	
Network Protocol	TCP/IPv4, TCP/IPv6	
Network Management Protocols	SNMP, HTTP, DHCP, BOOTP, APIPA, PING, DDNS, mDNS, SNT, SLP, WSD, LLTD	
Mobile and Cloud Printing		
Epson Connect	Epson iPrint, Epson Email Print, Remote Print Driver, Scan to Cloud	
Other Mobile Solutions	Apple AirPrint™, Mopria Print Service	
Control Panel		
LCD Screen	10.9 cm (4.3") Colour LCD Touchscreen	
Printer Software		
Software Support	Epson ScanSmart	
Operating System Compatibility	Windows XP / Vista / 7 / 8 / 8.1 / 10, Windows Server 2003 / 2008 / 2012 / 2016 / 2019 Mac OS X 10.6.8 or later	
Electrical Specifications		
Rated Voltage	AC 220 - 240 V	
Rated Frequency	50 - 60 Hz	
Power Consumption		
Operating	19.0 W	
Standby	9.1 W	
Sleep	0.8 W	
Power off	0.2 W	
Noise Level		
PC Printing / Plain Paper Default ^{1,3}	Sound Power: 6.6 db(A) / Sound Pressure: 6.1 db(A)	
Consumables		
Black Ink Bottle	7,500	
Cyan Ink Bottle	7,500	
Magenta Ink Bottle	6,000 (Composite Yield)	
Yellow Ink Bottle	6,000 (Composite Yield)	
Maintenance Box	C13T06G198 C13T06G298 C13T06G398 C13T06G498 C12C934601	

EcoTank L6570
Weight: 17.8 kg (39.2 lbs)



EcoTank L6580
Weight: 17.8 kg (39.2 lbs)

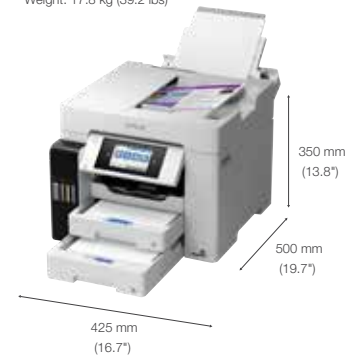

¹ Print speed (Pages Per Minute) is calculated when printed on A4 plain paper in the fastest mode, 10 x 15 cm photo print speed when printed on Epson Premium Glossy Photo Paper. Print speed may vary depending on system configuration, print mode, document complexity, software, type of paper used and connectivity. Print speed does not include processing time on host computer.



² Glossy paper drying time is minimum 24 hours as the inks used are pigment-based.

³ Default mode in accordance with ISO7779 for MFPs

⁴ Quoted yields are based on the ISO 24711/24712 patterns of mixed text and colour graphics with Epson methodology. Quoted yields are based on the replacement ink bottles purchased. For print quality, part of the ink from the included bottles is used for printer startup so yields could be lower than those of replacement ink bottles. Actual yields will vary due to reasons including images printed, print settings, temperature and humidity. Yields may be lower when printing infrequently or predominantly with one ink colour. Ink is used for both printing and printhead maintenance. All inks are used for both black and colour printing.

©2020 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation. All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Information correct as of January 2024

EPSON INDIA PVT. LTD.

12th Floor, The Millenia, Tower A, No.1, Murphy Road, Ulsoor, Bangalore 560 008.
Tel: 080-4566 5000, Fax: 080-4566 5005.

Regional Offices:

Ahmedabad 3314 8500/01, Chennai 3967 7500, Cochin 4012 315, Coimbatore 98942 19200, Kolkata 4603 4729, Mumbai 3079 8200, New Delhi 3312 0300, Pune 3028 6000/05, Hyderabad 4857 0032, Jaipur 78699 11699.



Epson Helpline: For product info or service - 1800 425 0011
For service - 1800 123 001 600 (9AM - 6PM) (Mon - Sat)
Email: think@eid.epson.co.in www.epson.co.in